


PRATIKA 55 SMART

AUTOMATIC PACKAGING MACHINE - L-SEALING - INTEGRATED TUNNEL

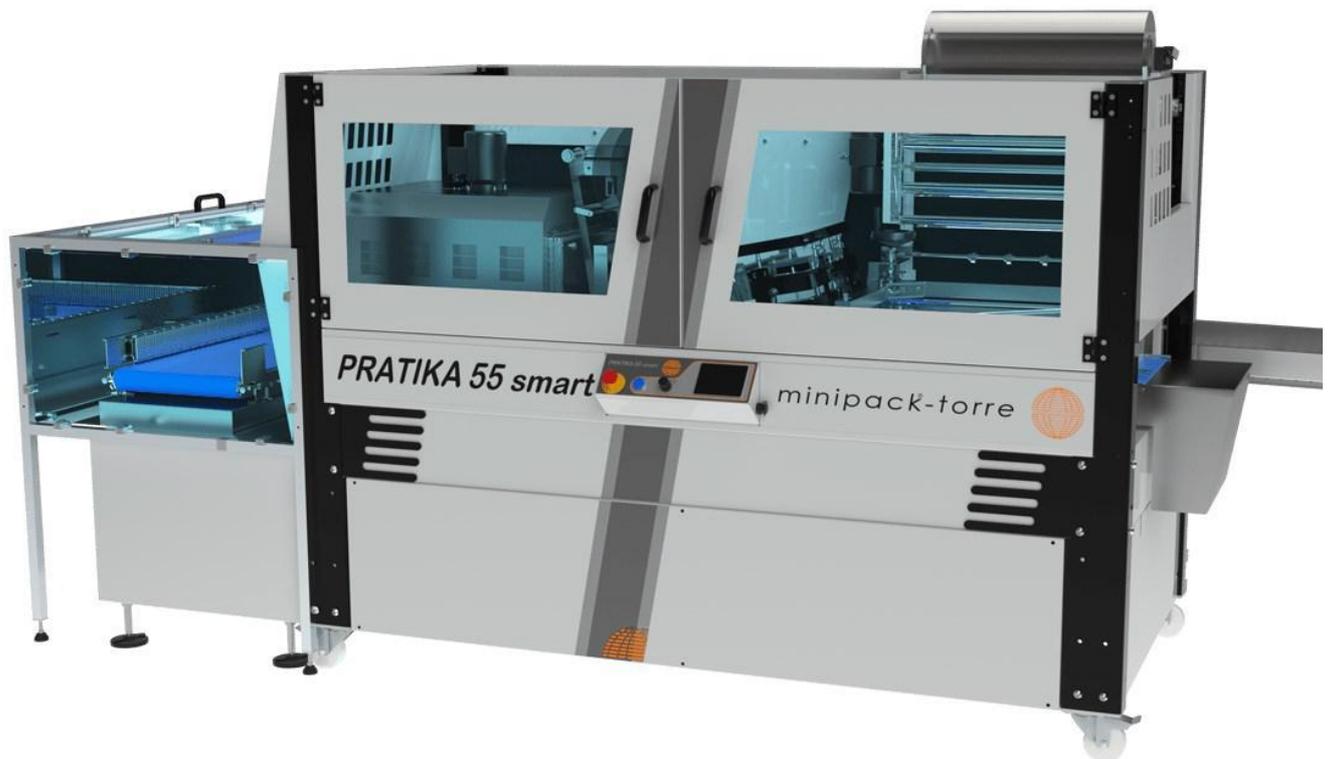

DESCRIPTION

The new version of the shrink wrap machine **Pratika 55 Smart** comes from a constant attention to the needs of the market, with the aim of proposing a technologically advanced product, but flexible and extremely compact. The included tunnel, revolutionary in the world of automatic machines, meets the space requirements, but above all reduces labour costs to a minimum, thanks to the patented option “come back” to a single operator.

Enhanced with strong technological, mechanical and electronic contents, the new **Pratika 55 Smart** represents a perfect synthesis of reliability, versatility and safety, by which the way of conceiving the shrink wrap machine with compact automatic operation evolves one more time.

TECHNICAL FEATURES

Power supply	400 V 3 ph + N 220 V 3 ph
Max installed power (including tunnel)	9 kW (400 V) 8,5 kW (220 V)
Hourly production	0-1200 pc/h
Max product dimensions	400x420x120h.
Max reel dimensions	300 mm (diameter)
Max reel strip dimensions	600 mm (width)
Worktop height	870 mm (infeed belt h.)
Machine dimensions	2390x1190x1680h. mm
Usable film	Polyolefin 9-38 micron
Machine weight	710/ 845 kg

minipack®-torre shall not be held liable for typos or printing errors in this catalogue. It also reserves the right to make changes to the specified features without prior notice. All trademarks are property of their respective owners and are hereby acknowledged.

TECHNICAL DRAWING

